US008754775B2

(12) **United States Patent**
Holcombe

(10) **Patent No.: US 8,754,775 B2**
(45) **Date of Patent: Jun. 17, 2014**

(54) **USE OF OPTICAL REFLECTANCE PROXIMITY DETECTOR FOR NUISANCE MITIGATION IN SMOKE ALARMS**

(75) Inventor: **Wayne T. Holcombe**, Mountain View, CA (US)

(73) Assignee: **Nest Labs, Inc.**, Palo Alto, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 777 days.

(21) Appl. No.: **12/727,983**

(22) Filed: **Mar. 19, 2010**

(65) **Prior Publication Data**

US 2010/0238036 A1 Sep. 23, 2010

Related U.S. Application Data

(60) Provisional application No. 61/162,193, filed on Mar. 20, 2009.

(51) **Int. Cl.**
G08B 17/10 (2006.01)

(52) **U.S. Cl.**
USPC ..... **340/629**; 340/628; 340/630; 340/309.16; 73/23.33; 73/23.35; 73/35.01; 250/200; 250/554; 116/67 R; 116/101; 116/216

(58) **Field of Classification Search**
USPC ..... 340/628–630, 577–584, 587, 309.16, 340/527; 73/23.33, 23.35, 53.01; 250/554, 250/200; 356/441; 116/101, 216, 67 R
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,101,637	A		12/1937	Davis
3,934,145	A	*	1/1976	Dobrzanski et al. 250/381
3,991,357	A		11/1976	Kaminski
4,183,290	A		1/1980	Kucharczyk
4,223,831	A		9/1980	Szarka
4,257,039	A	*	3/1981	Webb et al. 340/629
4,313,110	A	*	1/1982	Subulak et al. 340/527
4,335,847	A		6/1982	Levine
4,408,711	A		10/1983	Levine
4,615,380	A		10/1986	Beckey
4,674,027	A		6/1987	Beckey
4,685,614	A		8/1987	Levine
4,751,961	A		6/1988	Levine et al.

(Continued)

FOREIGN PATENT DOCUMENTS

CA	2202008	2/2000
EP	196069	12/1991

(Continued)

OTHER PUBLICATIONS

Aprilaire Electronic Thermostats Model 8355 User's Manual, Research Products Corporation, Dec. 2000, 16 pages.

(Continued)

Primary Examiner — Steven Lim
Assistant Examiner — Sisay Yacob
(74) *Attorney, Agent, or Firm* — Kilpatrick Townsend & Stockton LLP

(57) **ABSTRACT**

A smoke alarm comprises smoke detection circuitry for detecting smoke and generating a detection signal responsive thereto. Proximity detection circuitry generates a proximity detection signal responsive to detection of an object within in a selected distance of the smoke alarm. Alarm generation circuitry generates an audible alarm responsive to the detection signal. The audible alarm may be deactivated for a predetermined period of time responsive to at least one proximity detection signal.

14 Claims, 3 Drawing Sheets



(56) **References Cited**

U.S. PATENT DOCUMENTS

4,857,895	A		8/1989	Kaprelian
4,897,798	A		1/1990	Cler
4,975,684	A	*	12/1990	Guttinger et al. 340/587
5,088,645	A		2/1992	Bell
5,211,332	A		5/1993	Adams
5,240,178	A		8/1993	Dewolf et al.
5,244,146	A		9/1993	Jefferson et al.
5,250,904	A	*	10/1993	Salander et al. 324/430
5,395,042	A		3/1995	Riley et al.
5,476,221	A		12/1995	Seymour
5,499,196	A		3/1996	Pacheco
5,555,927	A		9/1996	Shah
5,611,484	A		3/1997	Uhrich
5,801,625	A	*	9/1998	Wang 340/506
5,808,294	A		9/1998	Neumann
5,902,183	A		5/1999	D'Souza
5,909,378	A		6/1999	De Milleville
5,918,474	A		7/1999	Khanpara et al.
5,977,964	A		11/1999	Williams et al.
6,062,482	A		5/2000	Gauthier et al.
6,066,843	A		5/2000	Scheremeta
6,095,427	A		8/2000	Hoium et al.
6,098,893	A		8/2000	Berglund et al.
6,111,511	A		8/2000	Sivathanu et al.
6,216,956	B1		4/2001	Ehlers et al.
6,349,883	B1		2/2002	Simmons et al.
6,356,204	B1		3/2002	Guindi et al.
6,370,894	B1		4/2002	Thompson et al.
6,415,205	B1		7/2002	Myron et al.
6,478,233	B1		11/2002	Shah
6,619,055	B1		9/2003	Addy
6,645,066	B2		11/2003	Gutta et al.
6,769,482	B2		8/2004	Wagner et al.
6,990,821	B2		1/2006	Singh et al.
7,024,336	B2		4/2006	Salsbury et al.
7,109,879	B2		9/2006	Stults et al.
7,149,729	B2		12/2006	Kaasten et al.
7,188,482	B2		3/2007	Sadegh et al.
7,379,791	B2		5/2008	Tamarkin et al.
RE40,437	E		7/2008	Rosen
7,469,550	B2		12/2008	Chapman, Jr. et al.
7,579,945	B1		8/2009	Richter et al.
7,623,028	B2		11/2009	Kates
7,644,869	B2		1/2010	Hoglund et al.
7,702,424	B2		4/2010	Cannon et al.
7,784,704	B2		8/2010	Harter
7,802,618	B2		9/2010	Simon et al.
7,848,900	B2		12/2010	Steinberg et al.
7,854,389	B2		12/2010	Ahmed
7,994,928	B2		8/2011	Richmond
8,010,237	B2		8/2011	Cheung et al.
8,016,205	B2		9/2011	Drew
8,019,567	B2		9/2011	Steinberg et al.
8,037,022	B2		10/2011	Rahman et al.
8,090,477	B1		1/2012	Steinberg
8,091,375	B2		1/2012	Crawford
8,098,166	B2		1/2012	Lang
8,131,497	B2		3/2012	Steinberg et al.
8,174,381	B2		5/2012	Imes et al.
8,180,492	B2		5/2012	Steinberg
8,219,249	B2		7/2012	Harrod et al.
2001/0038337	A1	*	11/2001	Wickstead et al. 340/628
2004/0164238	A1		8/2004	Xu et al.
2004/0249479	A1		12/2004	Shorrock
2005/0090915	A1		4/2005	Geiwitz
2005/0128067	A1		6/2005	Zakrewski
2005/0150968	A1		7/2005	Shearer
2005/0189429	A1		9/2005	Breeden
2005/0192915	A1		9/2005	Ahmed et al.
2005/0280421	A1		12/2005	Yomoda et al.
2006/0186214	A1		8/2006	Simon et al.
2006/0196953	A1		9/2006	Simon et al.
2007/0080819	A1	*	4/2007	Marks et al. 340/628
2007/0115902	A1		5/2007	Shamoon et al.
2007/0205297	A1		9/2007	Finkam et al.
2007/0266575	A1		11/2007	Nash
2008/0015742	A1		1/2008	Kulyk et al.
2008/0183335	A1		7/2008	Poth et al.
2008/0191045	A1		8/2008	Harter
2008/0273754	A1		11/2008	Hick et al.
2008/0317292	A1		12/2008	Baker et al.
2009/0171862	A1		7/2009	Harrod et al.
2009/0254225	A1		10/2009	Boucher et al.
2009/0259713	A1		10/2009	Blumrich et al.
2009/0297901	A1		12/2009	Kilian et al.
2009/0327354	A1		12/2009	Resnick et al.
2010/0019051	A1		1/2010	Rosen
2010/0025483	A1		2/2010	Hoeynck et al.
2010/0070084	A1		3/2010	Steinberg et al.
2010/0070086	A1		3/2010	Harrod et al.
2010/0070234	A1		3/2010	Steinberg et al.
2010/0084482	A1		4/2010	Kennedy et al.
2010/0167783	A1		7/2010	Alameh et al.
2010/0179704	A1		7/2010	Ozog
2010/0211224	A1		8/2010	Keeling et al.
2010/0238036	A1		9/2010	Holcombe
2010/0262298	A1		10/2010	Johnson et al.
2010/0262299	A1		10/2010	Cheung et al.
2010/0280667	A1		11/2010	Steinberg
2010/0289643	A1		11/2010	Trundle et al.
2010/0308119	A1		12/2010	Steinberg et al.
2010/0318227	A1		12/2010	Steinberg et al.
2011/0046792	A1		2/2011	Imes et al.
2011/0046805	A1		2/2011	Bedros et al.
2011/0046806	A1		2/2011	Nagel et al.
2011/0077896	A1		3/2011	Steinberg et al.
2011/0151837	A1		6/2011	Winbush, III
2011/0160913	A1		6/2011	Parker et al.
2011/0185895	A1		8/2011	Freen
2011/0307103	A1		12/2011	Cheung et al.
2011/0307112	A1		12/2011	Barrilleaux
2012/0017611	A1		1/2012	Coffel et al.
2012/0065935	A1		3/2012	Steinberg et al.
2012/0085831	A1		4/2012	Kopp
2012/0101637	A1		4/2012	Imes et al.
2012/0158350	A1		6/2012	Steinberg et al.
2012/0221151	A1		8/2012	Steinberg
2012/0252430	A1		10/2012	Imes et al.

FOREIGN PATENT DOCUMENTS

JP	59106311	6/1984
JP	01252850	10/1989
JP	09298780	11/1997

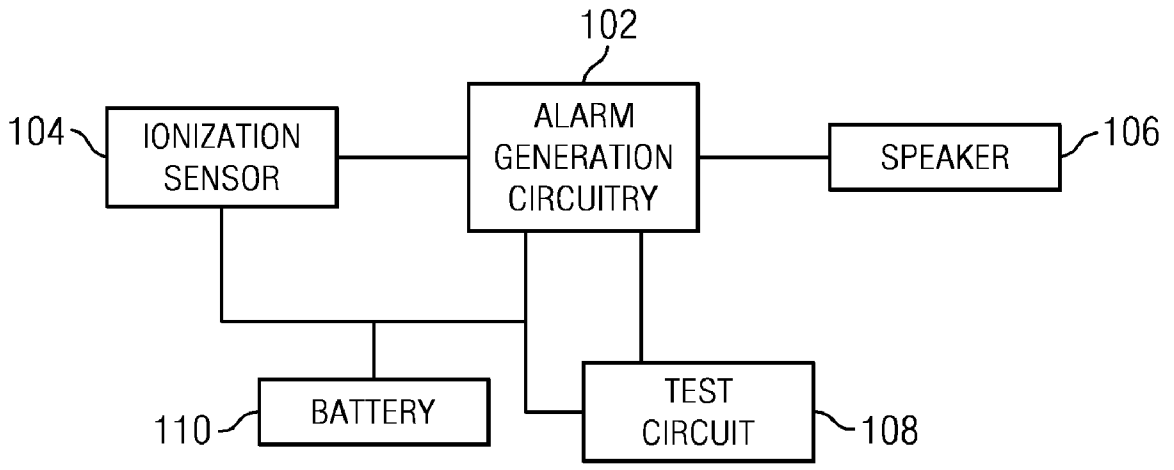OTHER PUBLICATIONS

Braeburn 5300 Installer Guide, Braeburn Systems, LLC, Dec. 9, 2009, 10 pages.

Braeburn Model 5200, Braeburn Systems, LLC, Jul. 20, 2011, 11 pages.

Ecobee Smart Si Thermostat Installation Manual, Ecobee, Apr. 3, 2012, 40 pages.

Ecobee Smart Si Thermostat User Manual, Ecobee, Apr. 3, 2012, 44 pages.

Ecobee Smart Thermostat Installation Manual, Jun. 29, 2011, 20 pages.

Ecobee Smart Thermostat User Manual, May 11, 2010, 20 pages.

Electric Heat Lock Out on Heat Pumps, Washington State University Extension Energy Program, Apr. 2010, pp. 1-3.

Honeywell Installation Guide FocusPRO TH6000 Series, Honeywell International, Inc., Jan. 5, 2012, 24 pages.

Honeywell Operating Manual FocusPRO TH6000 Series, Honeywell International, Inc., Mar. 25, 2011, 80 pages.

Honeywell Prestige IAQ Product Data 2, Honeywell International, Inc., Jan. 12, 2012, 126 pages.

Honeywell Prestige THX9321 and TXH9421 Product Data, Honeywell International, Inc., 68/0311, Jan. 2012, 126 pages.

Honeywell Prestige THX9321-9421 Operating Manual, Honeywell International, Inc., Jul. 6, 2011, 120 pages.

Hunter Internet Thermostat Installation Guide, Hunter Fan Co., Aug. 14, 2012, 8 pages.

(56) **References Cited**

OTHER PUBLICATIONS

Introducing the New Smart Si Thermostat, Datasheet [online]. Ecobee, Mar. 2012 [retrieved on Feb. 25, 2013]. Retrieved from the Internet: <URL: https://www.ecobee.com/solutions/home/smart-si/>, Mar. 12, 2012, 4 pages.
Lennox ComfortSense 5000 Owners Guide, Lennox Industries, Inc., Feb. 2008, 32 pages.
Lennox ComfortSense 7000 Owners Guide, Lennox Industries, Inc., May 2009, 15 pages.
Lennox iComfort Manual, Lennox Industries, Inc., Dec. 2010, 20 pages.
Lux PSPU732T Manual, Lux Products Corporation, Jan. 6, 2009, 48 pages.
NetX RP32-WiFi Network Thermostat Consumer Brochure, Network Thermostat, May 2011, 2 pages.
NetX RP32-WiFi Network Thermostat Specification Sheet, Network Thermostat, Feb. 28, 2012, 2 pages.
RobertShaw Product Manual 9620, Maple Chase Company, Jun. 12, 2001, 14 pages.
RobertShaw Product Manual 9825i2, Maple Chase Company, Jul. 17, 2006, 36 pages.
SA720 Smoke Alarm User Manual, First Alert, Aug. 2007, 6 pages.
Smoke Alarm User Manual, Kidde, i9060, Dec. 1, 2009, 2 pages.
SYSTXCCUIZ01-V Infinity Control Installation Instructions, Carrier Corp, May 31, 2012, 20 pages.
T8611G Chronotherm IV Deluxe Programmable Heat Pump Thermostat Product Data, Honeywell International Inc., Oct. 1997, 24 pages.
TB-PAC, TB-PHP, Base Series Programmable Thermostats, Carrier Corp, May 14, 2012, 8 pages.
The Perfect Climate Comfort Center PC8900A W8900A-C Product Data Sheet, Honeywell International Inc, Apr. 2001, 44 pages.
TP-PAC, TP-PHP, TP-NAC, TP-NHP Performance Series AC/HP Thermostat Installation Instructions, Carrier Corp, Sep. 2007, 56 pages.
Trane Communicating Thermostats for Fan Coil, Trane, May 2011, 32 pages.
Trane Communicating Thermostats for Heat Pump Control, Trane, May 2011, 32 pages.
Trane Install XL600 Installation Manual, Trane, Mar. 2006, 16 pages.
Trane XL950 Installation Guide, Trane, Mar. 2011, 20 pages.
Venstar T2900 Manual, Venstar, Inc., Apr. 2008, 113 pages.
Venstar T5800 Manual, Venstar, Inc., Sep. 7, 2011, 63 pages.
VisionPRO TH8000 Series Installation Guide, Honeywell International, Inc., Jan. 2012, 12 pages.
VisionPRO TH8000 Series Operating Manual, Honeywell International, Inc., Mar. 2011, 96 pages.
VisionPRO Wi-Fi Programmable Thermostat, Honeywell International, Inc. Operating Manual, Aug. 2012, 48 pages.
White Rodgers (Emerson) Model 1F81-261 Installation and Operating Instructions, White Rodgers, Apr. 15, 2010, 8 pages.
White Rodgers (Emerson) Model IF98EZ-1621 Homeowner's User Guide, White Rodgers, Jan. 25, 2012, 28 pages.
Allen et al., "Real-Time Earthquake Detection and Hazard Assessment by ElarmS Across California", Geophysical Research Letters, vol. 36, L00B08, 2009, pp. 1-6.
Deleeuw, "Ecobee WiFi Enabled Smart Thermostat Part 2: The Features Review", Retrieved from <URL: http://www.homenetworkenabled.com/content.php?136-ecobee-WiFi-enabled-Smart-Thermostat-Part-2-The-Features-review>, Dec. 2, 2011, 5 pages.
Gao et al., "The Self-Programming Thermostat: Optimizing Setback Schedules Based on Home Occupancy Patterns", In Proceedings of the First ACM Workshop on Embedded Sensing Systems for Energy-Efficiency in Buildings, Nov. 3, 2009, 6 pages.
Loisos et al., "Buildings End-Use Energy Efficiency: Alternatives to Compressor Cooling", California Energy Commission, Public Interest Energy Research, Jan. 2000, 80 pages.
Lu et al., "The Smart Thermostat: Using Occupancy Sensors to Save Energy in Homes", In Proceedings of the 8th ACM Conference on Embedded Networked Sensor Systems, Nov. 3-5, 2010, pp. 211-224.
Mozer, "The Neural Network House: An Environmental that Adapts to its Inhabitants", AAAI Technical Report SS-98-02, 1998, pp. 110-114.
Rauchwarnmelder, Installation and User Manual [online]. GIRA [retrieved on Mar. 8, 2013]. Retrieved from the Internet: <URL: http://download.gira.de/data2/23301210.pdf>.
Rauchwarnmelder, Datasheet [online]. GIRA [retrieved on Mar. 7, 2013]. Retrieved from the Internet: <URL: http://www.gira.de/gebaeudetechnik/produkte/sicherheit/rauchmelder/rauchwarnmelderdualvds.html>, 14 pages.
Rauchwarnmelder, Design [online]. GIRA [retrieved on Mar. 7, 2013]. Retrieved from the Internet: <URL: http://www.gira.de/gebaeudetechnik/produkte/sicherheit/rauchmelder/rauchwarnmelderdualvds.html?vid=1145>, 7 pages.

* cited by examiner

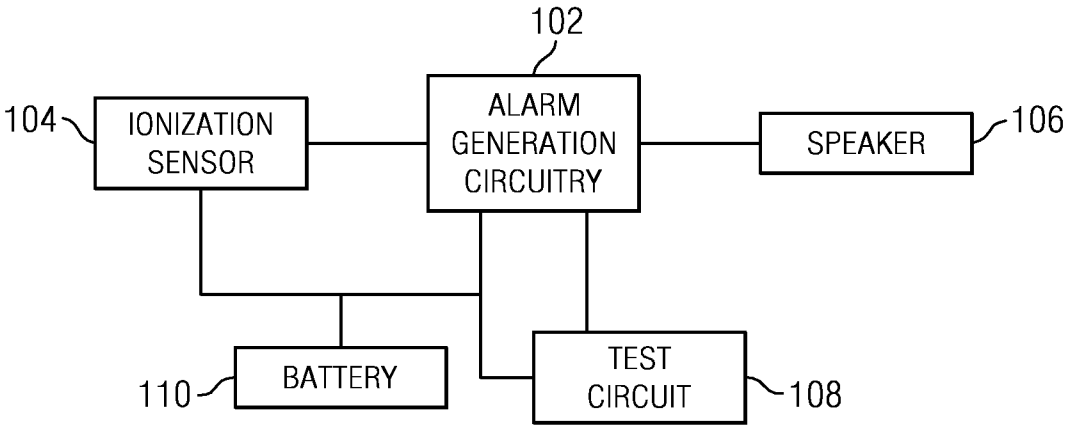
102
104
IONIZATION SENSOR
ALARM GENERATION CIRCUITRY
SPEAKER
106
110
BATTERY
TEST CIRCUIT
108

FIG. 1

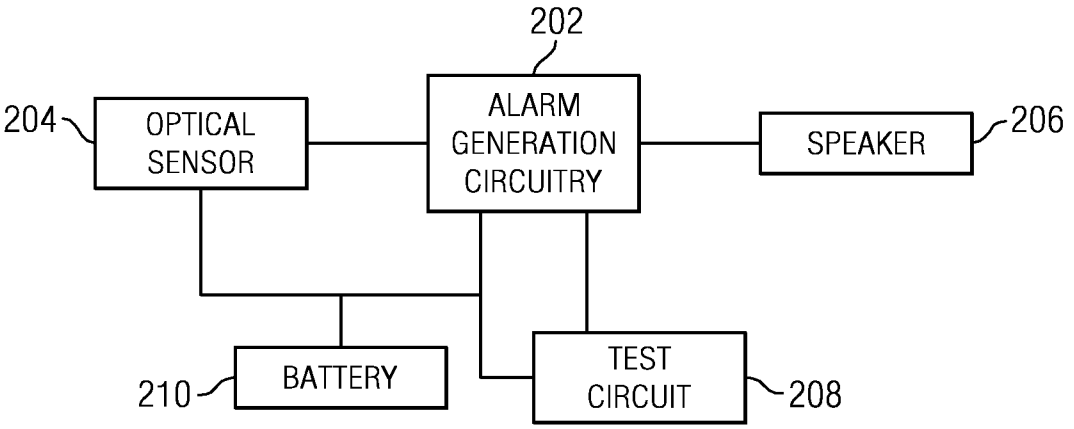
202
204
OPTICAL SENSOR
ALARM GENERATION CIRCUITRY
SPEAKER
206
210
BATTERY
TEST CIRCUIT
208

FIG. 2

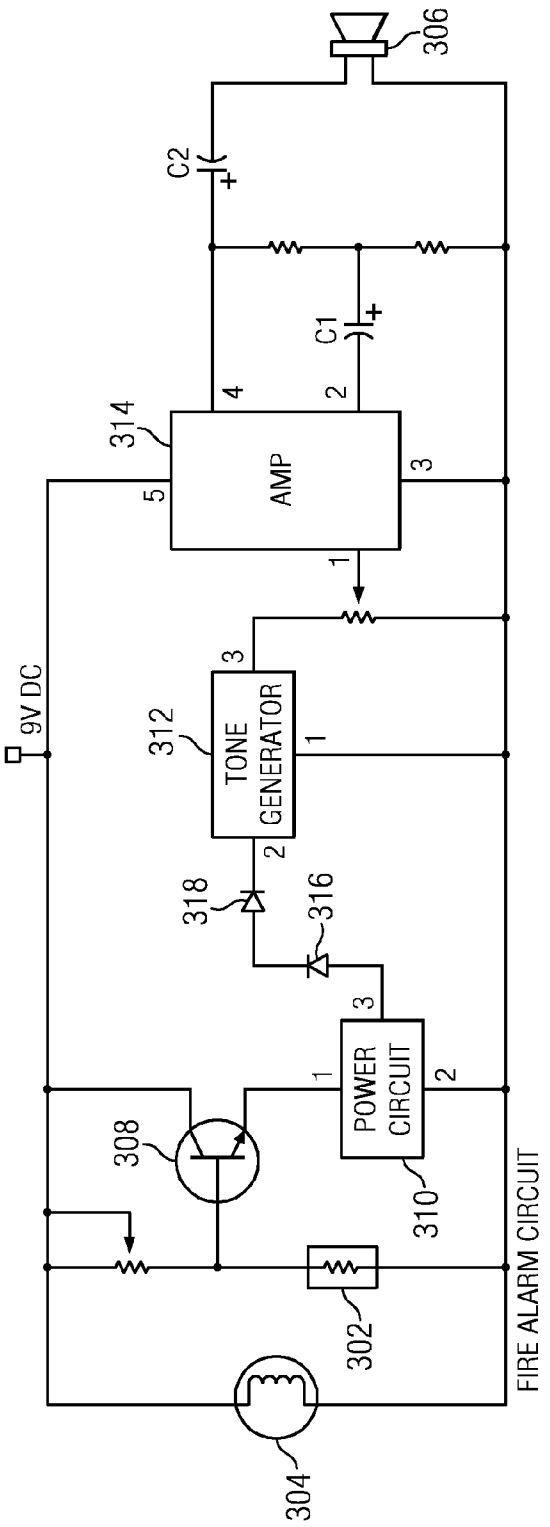
306
C2
C1
314
AMP
4
2
5
3
1
9V DC
312
TONE GENERATOR
3
1
2
318
316
3
1
POWER CIRCUIT
2
308
310
302
304
FIRE ALARM CIRCUIT

FIG. 3

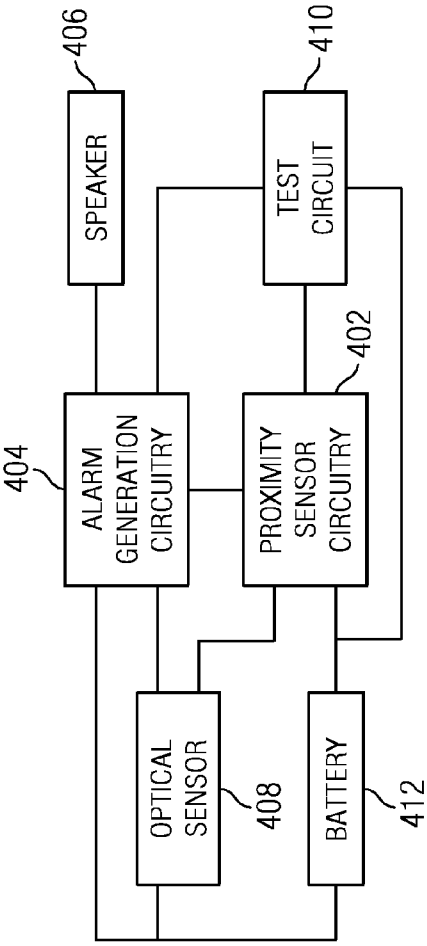
406
SPEAKER
410
TEST CIRCUIT
402
404
ALARM GENERATION CIRCUITRY
PROXIMITY SENSOR CIRCUITRY
OPTICAL SENSOR
408
BATTERY
412

FIG. 4

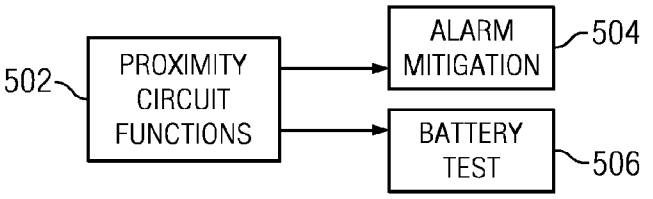
502
PROXIMITY CIRCUIT FUNCTIONS
ALARM MITIGATION
504
BATTERY TEST
506

FIG. 5

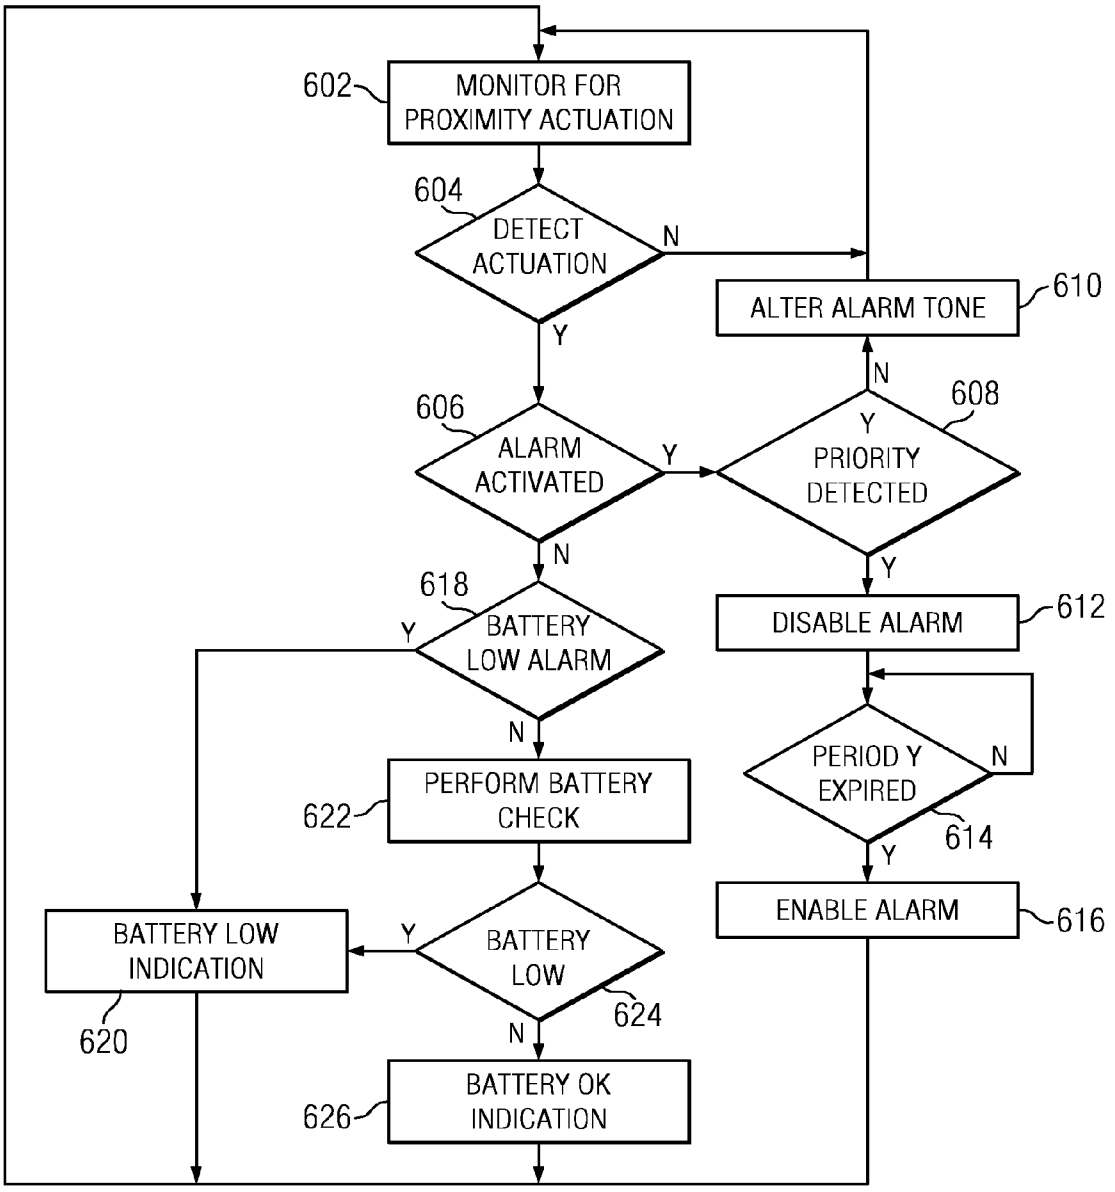
602
MONITOR FOR PROXIMITY ACTUATION
604
DETECT ACTUATION
N
Y
ALTER ALARM TONE
610
606
ALARM ACTIVATED
Y
608
PRIORITY DETECTED
N
Y
N
618
BATTERY LOW ALARM
Y
DISABLE ALARM
612
N
PERIOD Y EXPIRED
N
614
Y
622
PERFORM BATTERY CHECK
ENABLE ALARM
616
BATTERY LOW INDICATION
620
Y
BATTERY LOW
624
N
626
BATTERY OK INDICATION

FIG. 6

USE OF OPTICAL REFLECTANCE PROXIMITY DETECTOR FOR NUISANCE MITIGATION IN SMOKE ALARMS

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Application for Patent Ser. No. 61/162,193, filed on Mar. 20, 2009, and entitled "USE OF OPTICAL REFLECTANCE PROXIMITY DETECTOR FOR NUISANCE MITIGATION IN SMOKE ALARMS," the specification of which is incorporated herein by reference.

TECHNICAL FIELD

The present invention relates to smoke alarms, and more particularly to smoke alarms including proximity detectors for controlling operation of the smoke alarm.

BACKGROUND

Smoke alarms are utilized for detecting and warning the inhabitants of a home or other occupied location of the existence of smoke which may indicate a fire. Upon detection of the smoke by the smoke alarm, the device emits a shrill, loud alarm that notifies all individuals within the area that smoke has been detected and departure from the premises may be necessary.

While the smoke alarms are very effective at notifying individuals of the possible existence of fire that is generating the smoke, certain types of false alarm indications may often be very annoying to a user. These false alarms may be triggered, for example, by smoke generation within the kitchen during preparation of a meal. This may cause the creation of enough smoke that will set off the smoke alarm causing the loud, shrill alarm. In this case, a fire that is dangerous and out of control is not of concern to the residents so the loud, shrill smoke alarm will provide more of an annoyance than a benefit. Presently, there exists no method for easily discontinuing the loud, shrill alarm other than fanning the atmosphere in the area of the smoke alarm in an attempt to remove the smoke from the area that is causing the smoke alarm to activate or removing the battery or house power from the smoke alarm in order to turn it off. Removal of the power source may be difficult as smoke alarms are usually mounted upon the ceiling or other high area of the house or building to provide maximum smoke detection capabilities.

An additional problem with existing smoke alarms is the battery check or low battery condition. In smoke alarms that are powered by batteries, it is often necessary to periodically check the battery within the smoke alarm in order to confirm that the battery has sufficient charge. This often requires obtaining a ladder or chair for the user to reach the smoke alarm which has been placed in a substantially high location within the home or building to maximize smoke detection capabilities. The user is required to push a button that is located on the smoke alarm to perform a battery check. An audible signal is provided for an indication of whether or not the battery is in need of replacement.

An additional related problem relates to the low battery condition within a smoke alarm. When the battery reaches a low power condition, the smoke alarm will commonly beep at a low duty cycle of around once per minute. Unfortunately, this beep often occurs in early morning hours when the house temperature is at a minimum and these conditions maximize the low battery condition and increase the likelihood of an alarm. This is of course a most irritating time for this to occur. Additionally, the beep is very difficult to locate since the beep is short and a single high frequency tone. The beep is short to enable up to a week or more of low power battery alert on a mostly depleted battery. The alert transducer uses a single high frequency, typically around 3 kilohertz due to the need to produce a very high output from a small transducer which necessitates the use of a high frequency resonate transducer. Due to the reflections and use of half wavelengths shorter than the distance between the human ears, it is very difficult to localize the source which may present a problem since most homes normally include a number of smoke alarms.

Thus, there is a need to provide an improved method for temporarily mitigating an undesired activation of a smoke alarm and to provide battery check capabilities within the smoke alarm.

SUMMARY

The present invention, as disclosed and described herein, in one aspect thereof, comprises smoke detection circuitry for detecting smoke and generating a detection signal responsive thereto. Proximity detection circuitry generates a proximity detection signal responsive to the detection of an object within in a selected distance of the smoke alarm. Alarm generation circuitry generates an audible alarm responsive to the detection signal. The audible alarm may be deactivated for a predetermined period of time responsive to at least one proximity detection signal.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding, reference is now made to the following description taken in conjunction with the accompanying Drawings in which:

FIG. **1** is a block diagram of a ionization type smoke alarm;

FIG. **2** is a block diagram of an optical type smoke alarm;

FIG. **3** is a more detailed circuit diagram of an optical type smoke alarm;

FIG. **4** illustrates a block diagram of a smoke alarm including proximity sensor operation capabilities according to the present disclosure;

FIG. **5** illustrates the various functionalities associated with the smoke alarm including proximity sensor modes of operation; and

FIG. **6** is a flow diagram describing the operation of the smoke alarm including proximity sensor modes of operation.

DETAILED DESCRIPTION

Referring now to the drawings, wherein like reference numbers are used herein to designate like elements throughout, the various views and embodiments of a smoke alarm having proximity detection operation mode are illustrated and described, and other possible embodiments are described. The figures are not necessarily drawn to scale, and in some instances the drawings have been exaggerated and/or simplified in places for illustrative purposes only. One of ordinary skill in the art will appreciate the many possible applications and variations based on the following examples of possible embodiments.

Referring now to the drawings, and more particularly to FIG. **1**, there is illustrated a functional block diagram of a first type of smoke alarm. The smoke alarm of FIG. **1** utilizes ionization detection to detect smoke. The alarm generation circuitry **102** is associated with an ionization sensor **104**. The ionization sensor **104** detects particles of smoke using a small

amount of radioactive americium **241**. The radiation generated by the americium **241** passes through an ionization chamber within the ionization sensor **104**. The ionization chamber comprises an air-filled space between two electrodes that permit a small constant current between the electrodes. Any smoke that enters the chamber absorbs the alpha particles emitted by the americium **241** which reduces the ionization and interrupts the current between the electrodes. When this condition is detected, the ionization sensor **104** generates an alarm signal to the alarm circuitry **102** that generates an audible alarm signal that is provided to the speaker **106**. Associated with the ionization type smoke alarm is test circuitry **108** that enables testing of the present charge level associated with the battery **110**. The battery **110** provides power to the ionization sensor **104**, alarm generation circuitry **102**, speaker **106** and test circuit **108** to power the smoke alarm.

Referring now also to FIG. **2**, there is illustrated an alternative type of smoke alarm circuitry comprising an optical smoke alarm. The optical smoke alarm also includes alarm generation circuitry **202** that is responsive to smoke detection signals provided by an optical sensor **204**. The optical sensor **204** includes a light sensor that includes a light source which may comprise an incandescent bulb or infrared LED, a lens to collimate the light into a beam and a photo diode or other photoelectric sensor for detecting light from the light source. In the absence of smoke, the light passes in front of the detector in a straight line. When smoke enters the optical chamber of the optical sensor **204** across the path of the light beam, some light is scattered by the smoke particles redirecting them at the photo diode or photo sensor, and thus triggering generation of an alarm signal to the alarm circuitry **202**. The alarm generation circuitry **202** will generate the audible alarm signal to the speaker **206** associated with the alarm circuitry **202**. As with the ionization circuit, the optical smoke alarm utilizes a test circuit **208** to test the charge on the battery **210**. The battery **210** is responsible for powering all of the components of the optical smoke alarm including the alarm circuitry **202**, optical sensor **204**, speaker **206** and test circuit **208**.

As described previously, some issues arising with existing smoke alarms, be they ionization or optical type smoke alarms, arise from the creation of false alarm situations such as, for example, when a small amount of smoke is created within the kitchen due to burning toast, food falling on the heating element of the oven, etc., or the ability to quickly and easily check the battery charge using the test circuitry. Presently, mitigation of an alarm requires disconnection of the power source to the smoke alarm in order to discontinue an undesired alarm. Additionally, any type of test of the battery charge requires pushing of a button on the external surface of the smoke alarm that requires the user to be able to physically touch the smoke alarm. This often presents a great challenge since either removing power sources to discontinue an undesired alarm or pressing a button to perform battery test operations require the user to get out a ladder or stand on a chair to access the smoke alarm placed in a high location to ensure its optimal performance.

FIG. **3** illustrates a schematic diagram of an optical smoke detection alarm based upon an LDR (light detecting resistor) **302** and lamp **304** pair for sensing smoke. The alarm works by sensing the smoke produced during a fire. The circuit produces an audible alarm from speaker **306** when smoke is detected. When there is no smoke, the light from the lamp **304** falls directly upon the LDR **302**. The LDR resistance will be low, and the voltage across the LDR will be below 0.6 volts. Transistor **308** will be turned off in this state and the circuit is inactive. When there is sufficient smoke to mask the light from the lamp **304** falling on the LDR **302**, the LDR **302** resistance increases and so does the voltage across the LDR. This will cause the voltage at the gate of transistor **308** to increase and turn on transistor **308**. This provides a voltage to power circuit **310** which generates a 5 volt signal to a tone generator **312**. The tone signal from tone generator **312** is amplified by an amplifier **314** which is used to drive the speaker **306**. Diodes **316** and **318** are used to drop the voltage input to the tone generator **312** from the power circuit **310**.

Referring now to FIG. **4**, there is illustrated a block diagram of a circuit which enables a user to utilize proximity detection circuitry for temporarily abating an undesired alarm or performing battery test operations rather than using previously described processes. While the implementation with respect to FIG. **4** describes the use of proximity sensor circuitry **402** within an optical type smoke alarm, the proximity sensor circuitry **402** could also be implemented within the ionization type circuitry described hereinabove. The smoke alarm detection capabilities of the smoke alarm of FIG. **4** operate in a similar manner to the optical alarm described previously. Alarm generation circuitry **404** generates alarm signals to a speaker **406** responsive to smoke detection signals received from optical sensor **408**. The optical sensor **408** generates the smoke detection signal to the alarm generation circuitry **404** in the same manner as that described previously with respect to the optical smoke alarm of FIG. **2**.

The optical sensor **408** in addition to detecting smoke is used for detecting the proximity of a user's hand or other item in conjunction with the proximity sensor circuitry **402**. The proximity sensor circuitry **402** detects when a hand or for example, a broom or other item are being waved in close proximity to the smoke alarm. The optical sensor **408** comprises a short-range (approximately 6 inches) optical proximity sensor that in conjunction with the proximity sensor circuitry **402** may be used to control operations of the smoke alarm with either the wave of a hand or some other readily available object such as a broom. The test circuitry **410** enables testing of the charge within a battery **412**. The battery **412** provides power to each of the components within the smoke alarm circuit.

Utilizing a combination of the proximity sensor circuitry **402**, optical sensor **408** and alarm generation circuitry **404**, the smoke alarm may provide a number of proximity controller functionalities. These are generally illustrated in FIG. **5**. A number of proximity controlled functions **502** may be provided using the proximity sensor **402**. The proximity controlled functions include the alarm mitigation function **504** and the battery test function **506**. The alarm mitigation function **504** enables a temporary discontinuation of the audible alarm in situations when an undesired activation of the alarm has occurred. This would occur for example, when a small amount of smoke created within a kitchen that does not indicate a fire or emergency condition has been created. The proximity sensor of the smoke alarm is activated when an object such as a hand or a broom is brought close to the optical sensor **408**. If the smoke alarm has been activated due to kitchen smoke or other situations that have been resolved by human intervention, proximity detection would enable the user to disable the smoke alarm for a short period of time, such as 3 minutes, to allow the area around the smoke alarm to air out. A double wave or other more complex detection by the proximity sensor circuitry **402** and optical sensor **408** may be accomplished in a short period of time, such as less than 10 seconds in order to enable assurances that the detection was for a desired mitigation of the alarm and not some type of random event occurring during actual smoke detection.

In order to assist a user in temporarily mitigating the alarm, a momentary change in the audible alarm would be desirable for each proximity event that has been detected by the optical sensor **408** and proximity sensor circuit **402**. This would assist the user in knowing whether they had accurately or inaccurately waved their hand or broom in the area of the smoke alarm and provide for an audible indication of aiming feedback with respect to the proximity detection. After the appropriate combination of proximity detection events have been detected by the optical sensor **408** and proximity sensor circuit **402**, the audible alarm would be temporarily discontinued.

The smoke alarm commonly beeps at a low duty cycle of around once per minute when the battery **412** has its charge fall below a predetermined level. These beeps can often be very difficult to locate since the beep is short and comprises a single high frequency tone. The beep is short to enable up to a week or more of low battery alerts to be created on an almost depleted battery. The alert transducer uses a single high frequency chirp typically around 3 kilohertz due to the need to produce a very high output from a small transducer. This necessitates the use of a high frequency resonate transducer. Due to the reflections and the use of a half wavelength shorter than the distance between the human ear, it is often very difficult to locate the source requiring the user to check each smoke alarm within the house requiring a great deal of time.

The battery test functionality **506** enables a battery test operation to be performed on the battery **412** within the smoke alarm without having to manually press a button on the smoke alarm. The battery test functionality **506** can be utilized in two situations. When a low battery charge chirp is being emitted by the smoke alarm, the low battery test functionality **506** may be used to determine whether a particular smoke alarm has a low battery charge or whether the battery presently has sufficient charge. The battery test functionality **506** would similarly be useful for performing the periodic battery charge tests that are required to ensure the smoke alarm is in working operation.

By utilizing the proximity sensor circuitry **402**, if the smoke alarm has not been activated to indicate detection of smoke, the detection of a single proximity event from a hand or broom by the optical sensor **408** and proximity sensor circuitry **402** initiates a battery check test. If the battery **412** is weak, the test circuitry **410** will cause the production of a distinctive series of beeps or a distinctive tone to indicate a dying battery. If the battery **412** is sufficiently charged, a single short beep of a different tone may be created. Thus, if a user hears a low battery beep, they can use their broom or hand to quickly and easily check all of the smoke alarms within their home without having to climb up on a chair or ladder or remove the devices in order to press a detection button upon the smoke alarm.

As described previously, smoke alarms generally use either an ionization chamber or optical smoke detection circuitry or a combination of both to detect smoke. These differing techniques have distinct advantages and disadvantages. However, a high performance optical reflective detector implemented within the circuit of FIG. **4** including proximity sensor circuitry **402** can readily be adapted to detect reflectance from smoke and to provide proximity detection data since both detections are equivalent low reflectance functions. The proximity detector is more sophisticated since it must deal with ambient light while the conventional optical smoke detector does not have to cancel ambient light since it looks for reflections from smoke in an optically baffled compartment which blocks out ambient light but allows the entry of smoke. A reflectance proximity detector can drive two different LEDs, one for proximity detection and the other for smoke detection within the optical sensor **408**. A light pipe can provide a signal from the baffled smoke detector and also from the outside proximity view. Depending on which LED is driven, the proximity detector is either for reflectance above a threshold for either the proximity detection or for smoke and of course giving a different alarm response. Optionally, an auxiliary photo diode can be used for the smoke detector portion to avoid artifacts or issues arising from ambient light. Because the proximity detection technology uses a low duty cycle controller to make proximity detection measurements every second or so, this low duty cycle controller can also be used for the low duty cycle smoke controller which is beneficial for reducing battery charge consumption.

Referring now to FIG. **6**, there is illustrated a flow diagram describing the operation of the proximity detection controlled smoke alarm. Initially, at step **602**, the optical sensor **408** and proximity sensor circuitry **402** monitor for a proximity actuation. Inquiry step **604** determines whether there has been a detection of a proximity actuation. If not, control passes back to step **602** to continue monitoring for a proximity actuation. Once a proximity actuation is detected, inquiry step **606** determines if the smoke alarm is presently activated. If so, control passes to inquiry step **608** which determines if a predetermined number of proximity activations have been detected. If not, the alarm tone provided by the smoke alarm may be altered at step **610** and control returns back to step **602** to continue monitoring for additional proximity activations. If inquiry step **608** determines that a predetermined number of proximity actuations have been detected, the smoke alarm is disabled at step **612**. Inquiry step **614** monitors for the expiration of a selected period of time. If the period of time has not yet expired, the process remains at inquiry step **614**. Once the predetermined period of time has expired, control passes to step **616**, wherein the smoke alarm is re-enabled and control passes back to step **602** to continue monitoring for proximity actuation. Once the alarm is re-enabled, the smoke detector can monitor for smoke and react accordingly.

If inquiry step **606** determines that the smoke alarm is not presently activated, control passes to inquiry step **618** to make a determination if the battery low alarm is presently active for the smoke alarm. If so, a battery low indication is audibly provided from the smoke alarm at step **620**. If the battery low alarm has not been activated, a battery charge check is performed at step **622**. Inquiry step **624** determines whether the battery is in a low charge condition. If not, a battery OK audible indication is provided at step **626** to indicate a sufficient charge and control passes back to step **602**. If inquiry step **624** determines that the battery is in a low charge condition, the battery low indication is provided at step **620** before control passes back to step **602** to monitor for additional proximity actuations.

The above-described solution provides a low cost intuitive battery alarm control system to limit nuisance alarms within the smoke alarm and enables ease of battery charge checking using a proximity detection control process. The system also improves safety since users often remove batteries or take down smoke alarms that are producing spurious alarms or low battery beeping alarms. Users will also take down unaffected smoke alarms since the user cannot localize the beep associated with the alarm and then do not replace the alarm. Consumers do not check battery levels if the smoke alarm is out of reach. Additionally, use of an optical reflection proximity control system is better than a capacitive proximity system since convenient hand extension devices such as brooms would not work to activate a capacitive sensor which senses a conductive object such as the human hand or body.

It will be appreciated by those skilled in the art having the benefit of this disclosure that this smoke alarm having proximity detection operation mode provides an improved method for controlling operation of a smoke alarm. It should be understood that the drawings and detailed description herein are to be regarded in an illustrative rather than a restrictive manner, and are not intended to be limiting to the particular forms and examples disclosed. On the contrary, included are any further modifications, changes, rearrangements, substitutions, alternatives, design choices, and embodiments apparent to those of ordinary skill in the art, without departing from the spirit and scope hereof, as defined by the following claims. Thus, it is intended that the following claims be interpreted to embrace all such further modifications, changes, rearrangements, substitutions, alternatives, design choices, and embodiments.

What is claimed is:

1. A smoke alarm, comprising:

smoke detection circuitry for detecting smoke and generating a smoke detection signal responsive thereto;

proximity detection circuitry for generating a proximity detection signal when the proximity detection circuitry detects a movement of an object within a selected distance of the smoke alarm; and

alarm generation circuitry for generating an audible alarm responsive to the smoke detection signal, wherein the audible alarm is temporarily deactivated when at least two proximity detection signals are generated within a predetermined period of time and while the smoke detection signal is received.

2. The smoke alarm of claim **1**, further comprising:

battery charge test circuitry for determining a charge level of a battery associated with the smoke alarm; and

wherein the alarm generation circuitry generates a first audible indication when the charge level of the battery exceeds a predetermined level and generates a second audible indication when the charge level of the battery falls below the predetermined level.

3. The smoke alarm of claim **1**, wherein the alarm generation circuitry generates the audible alarm at a first level responsive to a first proximity detection signal and generates the audible alarm at a second level responsive to a second proximity detection signal when the audible alarm is at the first level.

4. The smoke alarm of claim **1**, wherein the smoke detection circuit comprises an optical detection circuit.

5. The smoke alarm of claim **1**, wherein the smoke detection circuit comprises an ionization detection circuit.

6. A method for controlling operation of a smoke alarm, comprising:

detecting smoke with the smoke alarm;

generating an audible alarm responsive to detection of the smoke;

detecting movement of an object within a selected distance of the smoke alarm, wherein the movement is detected using a proximity detection circuit; and

temporarily deactivating the audible alarm when at least two movements of the object are detected within a predetermined period of time and within the selected distance of the smoke detector and while detecting the smoke.

7. The method of claim **6**, further comprising:

reactivating the audible alarm after another predetermined period of time when the smoke is still detected by the smoke alarm.

8. The method of claim **6**, further comprising:

detecting movement of the object within the selected distance when an audible alarm is not being generated;

determining a charge level of a battery associated with the smoke alarm responsive to the detected movement;

generating a first audible indication when the charge level of the battery exceeds a predetermined level; and

generating a second audible indication when the charge level of the battery falls below the predetermined level.

9. The method of claim **6**, wherein the step of generating the audible alarm further includes:

generating the audible alarm at a first level responsive to a first detected movement of the object; and

generating the audible alarm at a second level responsive to a second detected movement when the audible alarm is at the first level.

10. A method for controlling operation of a smoke alarm, comprising:

detecting smoke with the smoke alarm;

generating an audible alarm responsive to detection of the smoke;

detecting movement of an object within a selected distance of the smoke alarm, wherein the movement is detected using a proximity detection circuit; and

controlling operation of the smoke alarm when at least two movements of the object are detected within a predetermined period of time and within the selected distance of the smoke alarm and while the smoke is detected.

11. The method of claim **10**, wherein controlling operation of the smoke alarm further includes temporarily deactivating the audible alarm.

12. The method of claim **11**, further comprising:

reactivating the audible alarm after another predetermined period of time when the smoke is still detected by the smoke alarm.

13. The method of claim **10**, wherein controlling operation of the smoke detector further includes:

detecting movement of the object within the selected distance when an audible alarm is not being generated;

determining a charge level of a battery associated with the smoke alarm responsive to the detected movement;

generating a first audible indication when the charge level of the battery exceeds a predetermined level; and

generating a second audible indication when the charge level of the battery falls below the predetermined level.

14. The method of claim **10**, wherein generating the audible alarm further includes:

generating the audible alarm at a first level responsive to a first detected movement of the object; and

generating the audible alarm at a second level responsive to a second detected movement when the audible alarm is at the first level.

* * * * *